

# Padouk

EXOTIC RANGE




Satin  
varnish



Dark  
veins



Singularities

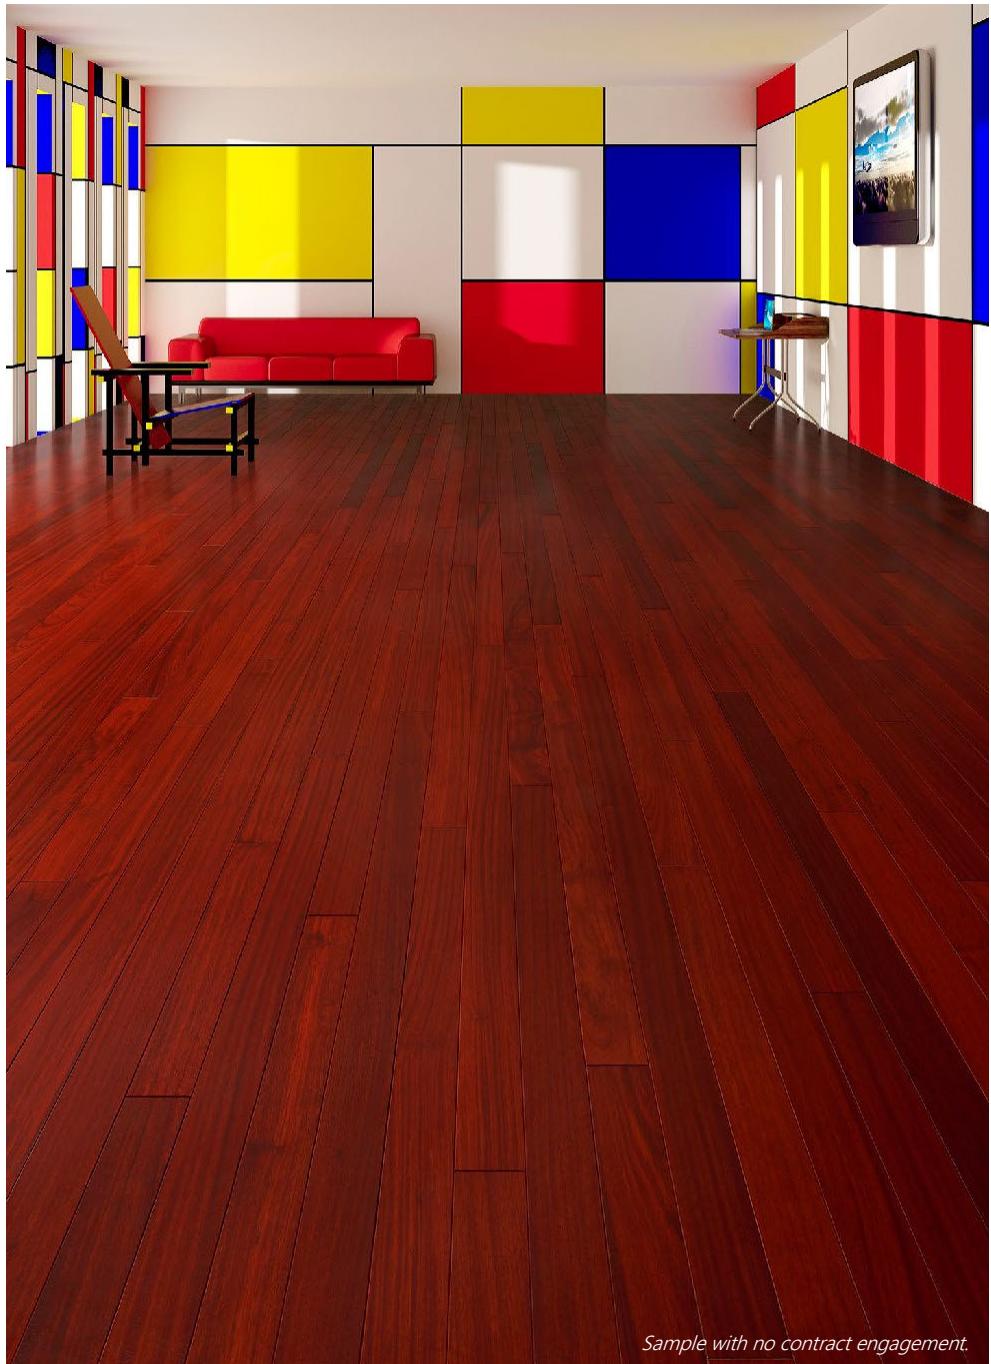

*Sample with no contract engagement.*

## DESIGN PARQUET

654 rue du Chalonge, P.A. du Haut-Montigné / 35370 Torcé / FRANCE  
Tél. +33 (0)2 99 49 66 66 / Fax +33 (0)2 99 49 66 67  
E-mail France : [commercial@designparquet.fr](mailto:commercial@designparquet.fr)  
E-mail Export : [export@designparquet.fr](mailto:export@designparquet.fr)

[www.designparquet.com](http://www.designparquet.com)

Previous data sheet are invalid. Errors or technical informations can  
be changes without notice.  
Updated in : January 2026.

# DATA SHEET - PADOUK

## CHARACTERISTICS

**Species (origin) :** Padouk (Africa).

**Description :** Bright coral red, with dark veining, darkening considerably in the light. The veining may show white streaks. Slight interlocked grain

**Support :** Solid or Loft Pro : engineered wood flooring on plywood base.

**Density :** 790 kg/m<sup>3</sup>.

**Finishing :** Raw, Satin varnish, Natura oil or Satin ROC varnish.

**Assembly :** Tongue and groove (T+G), Lamparquet (size 8 x 50).

**Particularity :** Wood is a natural material that evolves over time. Under the effect of sunlight, the color of your floor will age, a process that stabilizes after a few months of exposure.

SUPPORT	SIZE (MM)	LENGTH (MM)	TOP LAYER	BEVELS	THERMAL RESISTANCE K/W
SOLID	8 x 50 (lamparquet)	250	-	NO	0,04 m <sup>2</sup>
	14 x 90	300-1200	-	NO or 4	0,07 m <sup>2</sup>
	14 x 130	300-1500	-	NO or 4	0,07 m <sup>2</sup>
	20 x 130/140 <sup>(1)</sup>	400-2000	-	NO or 4	0,11 m <sup>2</sup>
LOFT PRO	12 x 90	400-1200	3,2 mm	2	0,06 m <sup>2</sup>
	15 x 130	400-1500	3,2 mm	2	0,08 m <sup>2</sup>

(1) According to wood supply

## TYPE OF INSTALLATION

- Floating according to DTU 51-11 (Loft Pro only).
- Glued according to NF DTU 51-2.
- Nailed according to DTU 51-1 (minimum thickness 20 mm).

## COMPATIBILITIES

Compatible on low temperature hydraulic underfloor heating and cooling (according size) :

COMPATIBILITIES			GLUED LAYING		FLOATING LAYING	
SUPPORT	THICKNESS (MM)	WIDTH (MM)	HEATING UNDERFLOOR	HEATING/COOLING UNDERFLOOR	HEATING UNDERFLOOR	HEATING/COOLING UNDERFLOOR
SOLID	8	50	YES	YES		
	14	90/130/140	YES	YES	-	-
	20	130/140	YES	NO	-	-
LOFT PRO	12	90	YES	YES	YES	NO
	15	130	YES	YES	YES	NO

It is imperative to start the heating 4 weeks before the beginning of the laying.

Heater off 48 hours before laying. Wait for 1 week and restart the heating gradually over 15-20 days. It is traditionally recommended a thermal resistance less than or equal to 0.09 m<sup>2</sup>.K/W.

For higher thermal resistances, a certain loss of capacity must therefore be considered.

It is imperative to respect the laying rules and the manufacturer's recommendations for use, as well as the governing regulations :

- NF DTU 35.14 – Execution of hot water floors.
- The CSTB 3164 booklet – Reversible floors.

Suitable with ISO dB and Iso alu (Cf data sheet).

## FLOOR MAINTENANCE

After installation, it is imperative to apply the following products to the parquet floor, depending on its Design Parquet finish :

FINISHING	DAILY CLEANING	REGULAR MAINTENANCE AND AFTER INSTALLATION
VARNISH	CLEANER (L+)	RENOVATOR MATT (R+)
NATURA OIL	NATURAL SOAP (S+)	MAINTENANCE OIL (N+)

- Remember to put protective pads under the legs of chairs and furniture.
- Carry out regular maintenance with a vacuum cleaner, broom, woollen cloth.
- Never wash your floor with large amounts of water.
- Do not use aggressive, abrasive, silicone or ammonia detergents.
- For persistent stains, remove with a damp sponge and neutral detergent.

## INFORMATIONS

- Air humidity at the time of laying and throughout the life of the product must be between 40% and 60%.
- Fire classification :
  - Dfl-s1 (Loft pro)
  - Cfl-s1 (solid)
- Hardness rank : D.
- Padouk Monnin hardness : 8,3.

## VOC EMISSIONS

INDOOR AIR EMISSIONS	
	A+
A+ A B C	

\*Information on the level of volatile compounds emission in inside air, that present a toxicity risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).

## RANKING USE

The classification of parquet flooring is based on the class of use. The UPEC\* classification does not apply to parquet flooring insofar as it can be renovated, but an equivalence can be made :

SUPPORT	THICKNESS (MM)	RANK	UPEC EQUIVALENCE
SOLID	8 (lamparquet)	 44	U <sub>3S</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>
	14	 34	U <sub>3S</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>
	20	 41	U <sub>3S</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>
LOFT PRO	12	 31	U <sub>3</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>
	15	 31	U <sub>3</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>

\* Wear, punching, water, chemistry.