


Herringbone

Oak in strips

MOSAIC RANGE

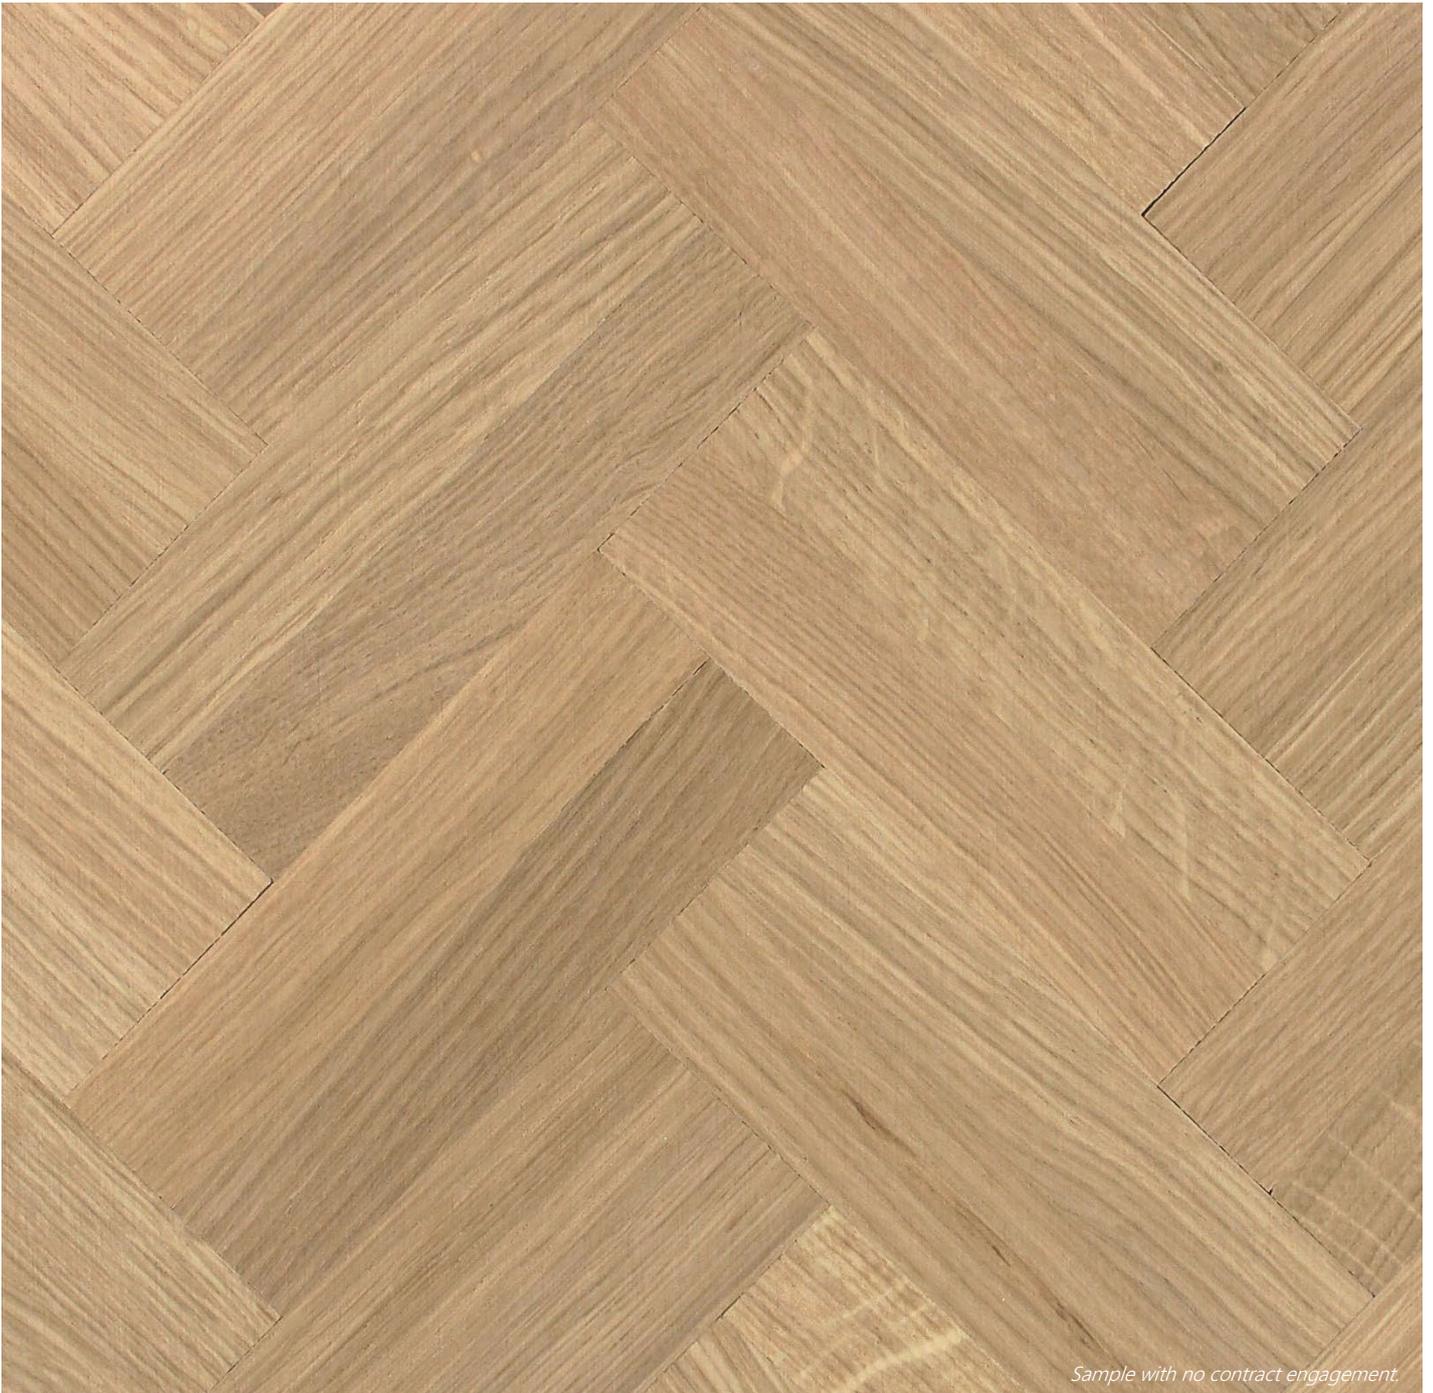

Sample with no contract engagement.

DESIGN PARQUET

654 rue du Chalonge, P.A. du Haut-Montigné / 35370 Torcé / FRANCE
Tél. +33 (0)2 99 49 66 66 / Fax +33 (0)2 99 49 66 67
E-mail France : commercial@designparquet.fr
E-mail Export : export@designparquet.fr

www.designparquet.com

Previous data sheet are invalid. Errors or technical informations can be changes without notice.
Updated in : January 2026.

DATA SHEET - HERRINGBONE MOSAIC

CHARACTERISTICS

Species (origin) : Oak (Europe).


Grade : PRIME (PR) : Small knots up to 10 mm, sapwoodless, slight colour variations.

Support : Solid.

Density : 650 kg/m³.

Type : Herringbone (Oak in strips).

Finishing : Unfinished.

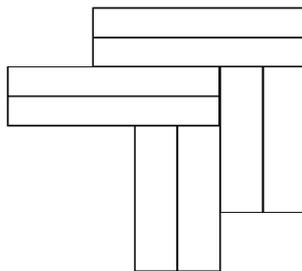

SUPPORT	THICKNESS (MM)	SIZE (MM)	TYPE	BEVELS	THERMAL RESISTANCE K/W
SOLID	8	120 x 24*	Herringbone	NO	0,03 m ²

* assembly (56 strips of 120 x 24 mm placed by pairs) on kraft paper.

TYPE OF INSTALLATION

- Glued according to NF DTU 51-2.

The Herringbone mosaics must be glued on their visible side (wood). The kraft paper that holds them will be removed by slightly moistening its surface, and it will completely disappear with sanding before finishing.

COMPATIBILITIES

Compatible on low temperature hydraulic underfloor heating and cooling (according size) :

COMPATIBILITIES			GLUED LAYING	
SUPPORT	THICKNESS (MM)	TYPE	HEATING UNDERFLOOR	HEATING/COOLING UNDERFLOOR
SOLID	8	Herringbone	YES	YES

It is imperative to start the heating 4 weeks before the beginning of the laying.

Heater off 48 hours before laying. Wait for 1 week and restart the heating gradually over 15-20 days. It is traditionally recommended a thermal resistance less than or equal to 0.09 m².K/W.

For higher thermal resistances, a certain loss of capacity must therefore be considered.

It is imperative to respect the laying rules and the manufacturer's recommendations for use, as well as the governing regulations :

- NF DTU 35.14 – Execution of hot water floors.
- The CSTB 3164 booklet – Reversible floors.

Suitable with ISO dB and Iso alu (Cf data sheet).

MAINTENANCE FLOOR

After finish :

- Remember to put protective pads under the legs of chairs and furniture.
- Carry out regular maintenance with a vacuum cleaner, broom, woollen cloth.
- Never wash your floor with large amounts of water.
- Do not use aggressive, abrasive, silicone or ammonia detergents.
- For persistent stains, remove with a damp sponge and neutral detergent.

INFORMATIONS

- Air humidity at the time of laying and throughout the life of the product must be between 40% and 60%.
- Fire classification :
 - Cfl-s1 (Solid)
- Hardness rank : C.
- Oak Monnin hardness : 4,2.

VOC EMISSIONS



*Information on the level of volatile compounds emission in inside air, that present a toxicity risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).

RANKING USE

The classification of parquet flooring is based on the class of use. The UPEC* classification does not apply to parquet flooring insofar as it can be renovated, but an equivalence can be made :

SUPPORT	THICKNESS (MM)	RANK	UPEC EQUIVALENCE
SOLID	8		U3s P3 E1 C0

* Wear, punching, water, chemistry.