


# CAMPAGNE OAK

NATURAL LOFT PRO OAK RANGE

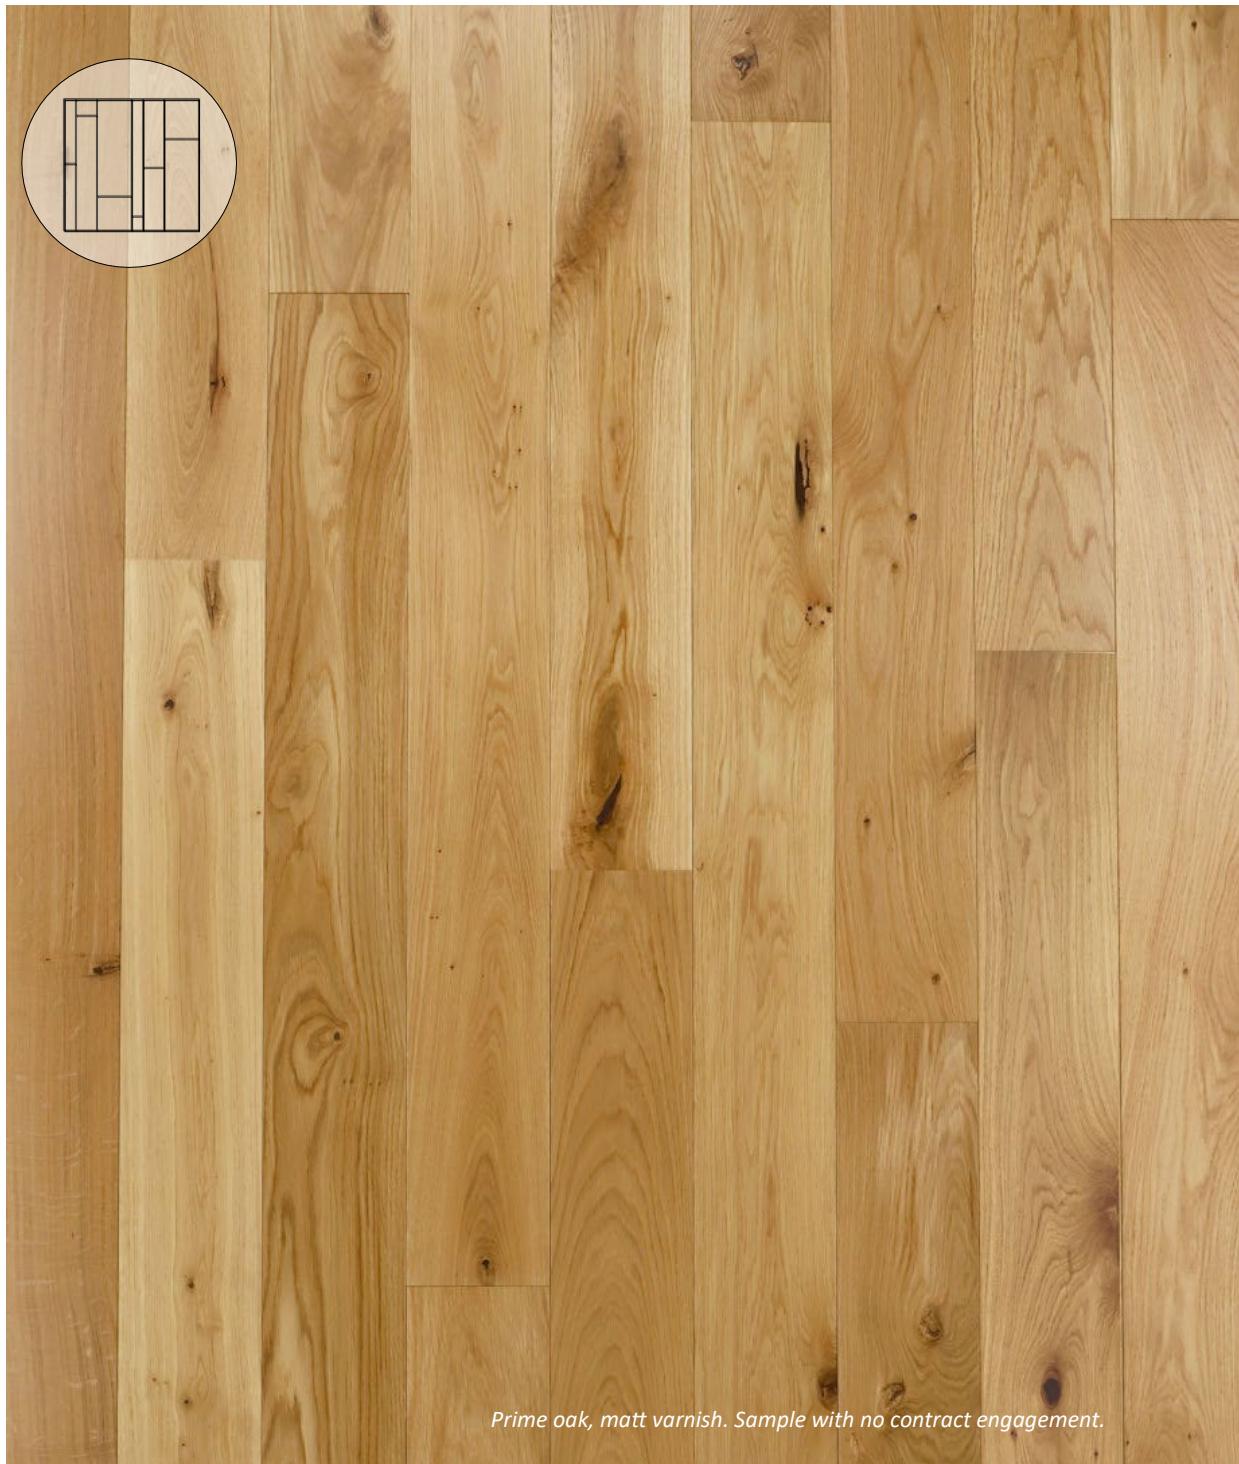

**DESIGN PARQUET**

654 rue du Chalonge, P.A. du Haut-Montigné / 35370 Torcé / FRANCE  
Tél. +33 (0)2 99 49 66 66 / Fax +33 (0)2 99 49 66 67  
E-mail France : [commercial@designparquet.fr](mailto:commercial@designparquet.fr)  
E-mail Export : [export@designparquet.fr](mailto:export@designparquet.fr)

[www.designparquet.com](http://www.designparquet.com)

Previous data sheets are invalid. Errors or technical informations  
can be changes without notice.  
Updated in : January 2026.

# DATA SHEET – CAMPAGNE LOFT PRO OAK

## CHARACTERISTICS

**Species (origin) :** Oak (Europe).

**Grade :** CAMPAGNE (CA) : Knots with unlimited and various sizes with wormhole limited. Pierced and crossed knots allowed. Open and through-knots accepted. Heavy color variations possible. Discoloration allowed. Cracks are limited to 50 mm in end's strip. *Unfinished wood flooring square edge : open knots not filled and not sanded. Unfinished 4 bevels : filled and not sanded. Finished wood flooring : filled knots.*

**Support :** Loft Pro : engineered wood flooring on plywood base.

**Density :** 650 kg/m<sup>3</sup>.

**Finishing :** Raw, Varnished (matt or colourless or satin), Oiled (Natura or colourless), or matt ROC Varnish.

**Assembly :** Tongue and groove (T+G)..

**Possible appearance :** Distressed (no bevels), brushed, structured, relief, sawn marks.

**Laying :** Random lengths strips, French style (others laying on request).

LAYING	SIZE (MM) <sup>(1)</sup>	TOP LAYER	BEVELS	THERMAL RESISTANCE K/W
RANDOM LENGTHS STRIPS	12 x 90 <sup>(3)</sup> /145/180	3,2 mm	2	0,08 m <sup>2</sup>
	15 x 90/145/180	4,5 mm	2	0,09 m <sup>2</sup>
	15 x 220	4,0 mm <sup>(2)</sup>	2	0,09 m <sup>2</sup>
	20 x 180	4,5 mm 7,0 mm	2	0,13 m <sup>2</sup>
	XXL 20 x 295	4,0 mm <sup>(2)</sup>	2	0,13 m <sup>2</sup>
FRENCH STYLE	15 x 90+145+220	4,5 mm	2	0,09 m <sup>2</sup>

(1) Refer to the pricelist to know all length available according to the size.

(2) Top layer 4.5 mm instead of 4.0 mm (or ROC varnish finish) on request, to reach the superior ranking use

(3) Grade NA/CA : mix of Nature and Campagne grade.

## TYPES OF INSTALLATION

- Floating according to DTU 51-11
- Glued according to NF DTU 51-2.
- Nailed according to DTU 51-1 (mini thickness 20 mm).

## COMPATIBILITIES

Compatible on low temperature hydraulic underfloor heating and cooling (according size) :

COMPATIBILITIES		GLUED LAYING		FLOATING LAYING		
SUPPORT	THICKNESS (MM)	WIDTH (MM)	HEATING UNDERFLOOR	COOLING UNDERFLOOR	HEATING UNDERFLOOR	COOLING UNDERFLOOR
LOFT PRO	12	90/120/145/180	OUI	OUI	OUI	NON
	15	90/145/180/220	OUI	OUI	OUI	NON
	20	180/295	OUI	NON	NON	NON

It is imperative to start the heating 4 weeks before the beginning of the laying.

Heater off 48 hours before laying. Wait for 1 week and restart the heating gradually over 15-20 days. It is traditionally recommended a thermal resistance less than or equal to 0.09 m<sup>2</sup>.K/W.

For higher thermal resistances, a certain loss of capacity must therefore be considered.

It is imperative to respect the laying rules and the manufacturer's recommendations for use, as well as the governing regulations :

- NF DTU 35.14 – Execution of hot water floors.
- The CSTB 3164 booklet – Reversible floors.

Suitable with ISO dB and Iso alu (Cf data sheet).

After installation, it is imperative to apply the following products to the parquet floor, depending on its finish :


FINISHING	DAILY CLEANING	AFTER INSTALLATION AND REGULAR MAINTENANCE	
VARNISH	CLEANER 	RENOVATOR MATT 	
NATURA OIL	NATURAL SOAP 	MAINTENANCE OIL 	
COLOURLESS OIL	NATURAL SOAP 	MAINTENANCE OIL 	

- Remember to put protective pads under the legs of chairs and furniture.
- Carry out regular maintenance with a vacuum cleaner, broom, woollen cloth.
- Never wash your floor with large amounts of water.
- Do not use aggressive, abrasive, silicone or ammonia detergents.
- For persistent stains, remove with a damp sponge and neutral detergent.

## INFORMATIONS

- Air humidity at the time of laying and throughout the life of the product must be between 40% and 60%.
- Fire classification :
  - Dfl-s1
  - Cfl-s1 (with top layer > 5 mm)
- Hardness rank : C.
- Oak Monnin hardness : 4,2.

## VOC EMISSIONS



\*Information on the level of volatile compounds emission in inside air, that present a toxicity risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).

## RANKING USE

The classification of parquet flooring is based on the class of use. The UPEC\* classification does not apply to parquet flooring insofar as it can be renovated, but an equivalence can be made :

SUPPORT	THICKNESS (MM)	RANK	UPEC EQUIVALENCE
LOFT PRO	12/15/20 (3,2 ; 4,0 mm)		U3 P3 E1 C0
	15 (4,5 mm)		U3S P3 E1 C0
	20 (7,0 mm)		U3S P3 E1 C0

\* Wear, punching, water, chemistry.

## FLOOR MAINTENANCE

# CAMPAGNE OAK

NATURAL SOLID OAK RANGE



*Prime oak, matt varnish. Sample with no contract engagement*

---

## DESIGN PARQUET

654 rue du Chalonge, P.A. du Haut-Montigné / 35370 Torcé / FRANCE  
Tél. +33 (0)2 99 49 66 66 / Fax +33 (0)2 99 49 66 67  
E-mail France : [commercial@designparquet.fr](mailto:commercial@designparquet.fr)  
E-mail Export : [export@designparquet.fr](mailto:export@designparquet.fr)

[www.designparquet.com](http://www.designparquet.com)

Previous data sheets are invalid. Errors or technical informations  
can be changes without notice.  
Updated in : January 2026.

# DATA SHEET - CAMPAGNE OAK SOLID

## CHARACTERISTICS

**Species (origin) :** Oak (Europe).

**Grade :** CAMPAGNE (CA) : Knots with unlimited and various sizes with wormhole limited. Pierced and crossed knots allowed. Open and through-knots accepted. Heavy color variations possible. Discoloration allowed and sapwood without limit. Cracks are limited to 50 mm in end's strip. Unfinished wood flooring square edge : open knots not filled and not sanded. Unfinished 4 bevels : filled and not sanded. Finished wood flooring : filled knots.

**Support :** Solid

**Density :** 650 kg/m<sup>3</sup>.

**Finishing :** Raw, Varnished (matt or colourless or satin), Oiled (Natura or colourless), or matt ROC Varnish.

**Assembly :** Tongue and groove (T+G), Lamparquet (10x50/60).

**Possible appearance :** Distressed (no bevels), brushed, heavy brushed, very heavy brushed, sawn marks.

**Pattern :** Random lengths strips, Chevron (others laying on request).

SUPPORT	SIZE (MM) <sup>(1)</sup>	TOP LAYER	BEVELS	THERMAL RESISTANCE K/W
RANDOM LENGTHS STRIPS	14 x 130	6	NO or 4	0,09 m <sup>2</sup>
	20 x 140/180	9	NO or 4	0,13 m <sup>2</sup>
	23 x 90/120	9	NO or 4	0,14 m <sup>2</sup>
CHEVRON	14 x 70/90/130 <sup>(2)</sup>	6	NO or 4	0,09 m <sup>2</sup>
	23 x 90/120	9	NO or 4	0,14 m <sup>2</sup>

(1) Refer to the pricelist to know all length available according to the size.

(2) Grade NA/CA : mix of grade Nature and campagne

## TYPES OF INSTALLATION

- Glued according to NF DTU 51-2.
- Nailed according to DTU 51-1 (mini thickness 20 mm).

## COMPATIBILITIES

Compatible on low temperature hydraulic underfloor heating and cooling (according size) :

COMPATIBILITIES		GLUED LAYING		FLOATING LAYING	
SUPPORT	THICKNESS (MM)	WIDTH (MM)	HEATING UNDERFLOOR	COOLING UNDERFLOOR	HEATING UNDERFLOOR
SOLD	14	70/90/110/130	OUI	OUI	-
	20	140	OUI	NON	-
	20	180	NON	NON	-
	23	90/120	NON	NON	-

It is imperative to start the heating 4 weeks before the beginning of the laying.

Heater off 48 hours before laying. Wait for 1 week and restart the heating gradually over 15-20 days. It is traditionally recommended a thermal resistance less than or equal to 0.09 m<sup>2</sup>.K/W.

For higher thermal resistances, a certain loss of capacity must therefore be considered.

It is imperative to respect the laying rules and the manufacturer's recommendations for use, as well as the governing regulations :

- NF DTU 35.14 – Execution of hot water floors.
- The CSTB 3164 booklet – Reversible floors.

Suitable with ISO dB and Iso alu (Cf data sheet).

## FLOOR MAINTENANCE

After installation, it is imperative to apply the following products to the parquet floor, depending on its finish :

FINISHING	DAILY CLEANING	AFTER INSTALLATION AND REGULAR MAINTENANCE
VARNISH	CLEANER 	RENOVATOR MATT 
NATURA OIL	NATURAL SOAP 	MAINTENANCE OIL 
COLOURLESS OIL	NATURAL SOAP 	MAINTENANCE OIL 

- Remember to put protective pads under the legs of chairs and furniture.
- Carry out regular maintenance with a vacuum cleaner, broom, woollen cloth.
- Never wash your floor with large amounts of water.
- Do not use aggressive, abrasive, silicone or ammonia detergents.
- For persistent stains, remove with a damp sponge and neutral detergent.

## INFORMATIONS

- Air humidity at the time of laying and throughout the life of the product must be between 40% and 60%.
- Fire classification :
  - Cfl-s1
- Hardness rank : C.
- Oak Monnin hardness : 4,2.


## VOC EMISSIONS

INDOOR AIR EMISSIONS	
	
A+ A B C	

\*Information on the level of volatile compounds emission in inside air, that present a toxicity risk by inhalation, on a scale from A+ (very low emissions) to C (high emissions).

## RANKING USE

The classification of parquet flooring is based on the class of use. The UPEC\* classification does not apply to parquet flooring insofar as it can be renovated, but an equivalence can be made :

SUPPORT	THICKNESS (MM)	RANK	UPEC EQUIVALENCE
SOLID	14		U <sub>3S</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>
	20/23		U <sub>3S</sub> P <sub>3</sub> E <sub>1</sub> C <sub>0</sub>

\* Wear, punching, water, chemistry.